

## ALPHA LEDランタンスピーカー




取扱説明書

ColaPuede ALPHAをお選びいただき誠にありがとうございます。


ご使用になられる前に、この説明書をお読みください。万一、本製品のご使用中に問題が生じましたら、下記メールアドレスからお気軽にお問い合わせください。迅速にご対応させていただきます。

MAIL:colapuede@gmail.com

### 各部の名称/機能

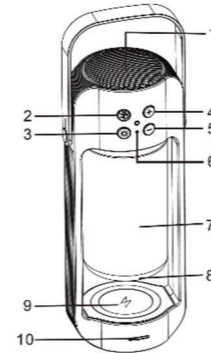

- |                    |              |
|--------------------|--------------|
| 1.スピーカー            | 6.マイク        |
| 2.電源ボタン<br>再生/一時停止 | 7.ランプ        |
| 3.LEDライトボタン        | 8.ベース        |
| 4.音量アップ            | 9.ワイヤレス充電パッド |
| 5.音量ダウン            | 10.インジケータ    |

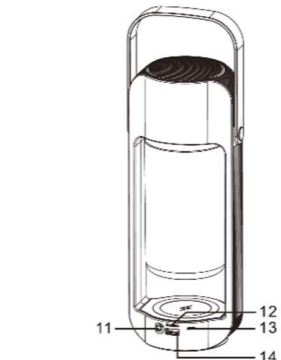

- |             |
|-------------|
| 11.AUX入力    |
| 12.TFカード挿入口 |
| 13.充電ポート    |
| 14.USBポート   |

### 使用方法

#### 1. Bluetoothスピーカー

電源ボタンを長押ししてデバイスの電源を入れ、ペアリングを開始します。(LEDインジケータが点滅。)  
接続する端末にて「SelfieCom-Alpha」を検索しペアリングします。正常に接続されると、LEDインジケータが点灯に変わります。

#### 2. TWSシステム

ALPHAを2台同時にペアリングすることが可能です。両方のデバイスの電源がONの状態のとき、2つのデバイスがペアになり、ステレオ再生されます。(約5秒かかります。)この状態では、Bluetoothペアリングリストには名前が1つだけ表示され、音楽の再生、音量調節、曲の切り替えを同期して行うことができます。

#### 3. ワイヤレス充電機能

2A充電ケーブル(同梱品)と9V充電アダプター(付属していません)を本体に接続し、ランプの下のワイヤレス充電パッドにスマートフォン(Qi標準)を置くことで、10Wの電力でワイヤレス充電できます。iPhoneを使用している場合は、最大電力は7.5Wです。

※外部電源から電力を供給されているときのみ、ワイヤレス充電パッドは機能します。

#### 4. LEDランタン

コントロールパネルのLEDライトボタンを押すことで、LEDモードを切り替えることができます。  
炎>常夜灯>消灯と変化し、様々な状況に対応します。

#### 5. TFカードとU-Disksの音楽再生

TFカードやU-Disksに音楽が保存されている場合、このデバイスで再生できます。  
TFカードやU-Disksの挿入が検出されると、Bluetooth機能は自動で切断されます。  
TFカードやU-Disksが取り外されると、Bluetooth機能は再びアクティブになります。

#### 6. モバイルバッテリー

USBポートに充電ケーブルを接続することで、お使いの端末を0.5mAhの出力で充電できます。

#### 7. AUX入力

3.5mmオーディオケーブルでコンピューター等に接続すると、通常のスピーカーとしてご利用可能です。

## ALPHA FLAME LED PLUS SPEAKER




User Manual


Thank you for choosing SelfieCom-Alpha!

Please read this manual before first usage. If you have any issues while using our product, feel free to contact us for after sale service. We will take care of your issue as soon as possible

### KEYS AND FUNCTIONS

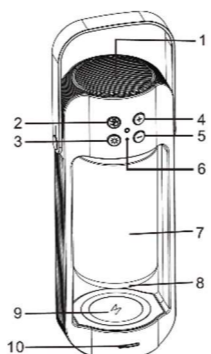

- |                               |                     |
|-------------------------------|---------------------|
| 1. Speaker                    | 5. Volume Down      |
| 2. Power button<br>Play/Pause | 6. Microphone       |
| 3. LED control                | 7. Flame lamp       |
| 4. Volume Up                  | 8. Bass             |
|                               | 9. Wireless Charger |
|                               | 10. Indicator       |

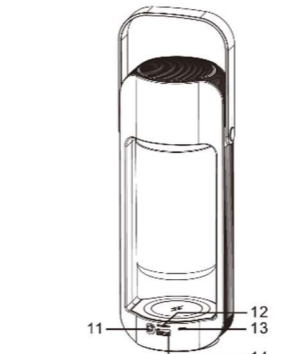

- |                   |
|-------------------|
| 11. AUX IN        |
| 12. TF card slot  |
| 13. charging port |
| 14. USB slot      |

### How to Use it

#### 1 Bluetooth speaker

Long press the power button to turn device on and start pairing(LED indicator flashes), search and pair with "SelfieCom-Alpha" on your cellphone, LED indicator stops flashing once successfully connected.

#### 2. TWS system

Either 2 sets of Alpha can be paired with each other. You can turn on both devices at the same time (or turn on another device while one is in working status), it takes about 5 seconds for two devices to pair with each other and play stereo sounds. Under this status, Bluetooth pairing list shows only one name, and music playing, volume control, switching songs were all synchronized.

#### 3. Wireless charging function

Use the 2A charging cable (included in package) and a 9V charging adaptor (not included), you can charge your cellphone (Qi standard) with 10W power wirelessly by placing your phone on the wireless charger pad under the lamp.  
If you are using an iPhone, the max power is 7.5W only. (iOS limited, not quality issue)

※ The wireless charger pad will work only when powered by external power source. It will not generate power source from inner battery.

#### 4. Flame & Night lamp LED

You can switch the LED modes by pressing the bulb button on the control panel, Flame>night lamp>light off, suitable with different occasions.

#### 5. TF cards & U-Disks music play

This device supports plug-play for TF cards & U-disks if you saved some songs in them. And Wireless function will auto disconnected when TF cards/U-disks were detected plugged in.

Wireless function will active again only when TF cards/U-disks were removed.

#### 6. Emergency power bank

This device can be used as an emergency powerbank. Through the USB port, it generates 0.5mah currency output to ensure your phones battery not dead.

#### 7. AUX IN

You can connect Alpha to your desktop computer or laptop via 3.5mm audio cable to make it work as a normal speaker.